


Crystal Recessed Remote

Edge-lit LED Exit Signs Series CRRRE

CRRRE.05.08.4

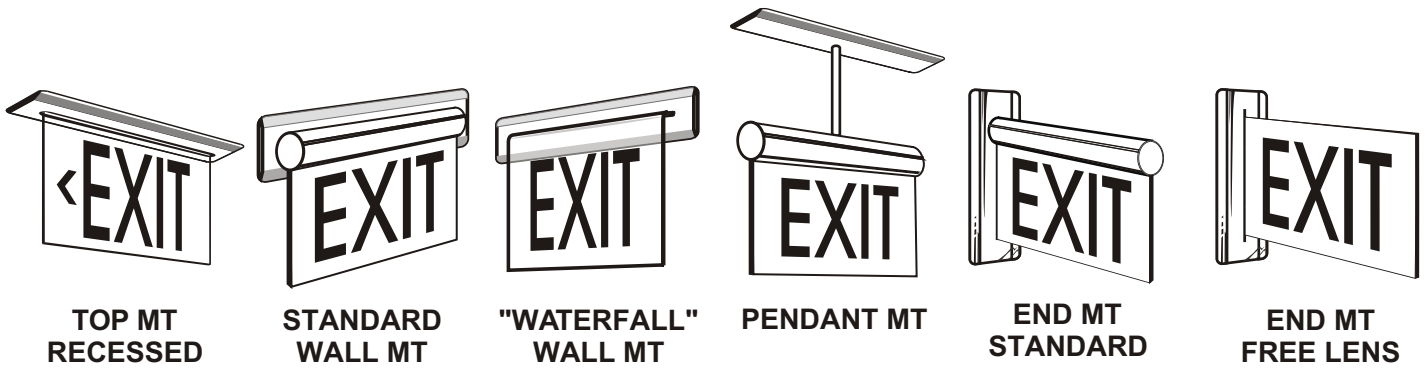

CONSTRUCTION

- An extruded aluminum LED lamp housing is fitted within a recessed backbox fabricated from 18 SWG galvanized steel.
- Standard finishes: satin white enamel and brushed aluminum.
- Diamond polished acrylic lenses for optimum light transmission, exterior quality and high brightness.
- Ultra high output LEDs with up to 5 candela output in green or red produce brilliant graphic illumination well above code minimums.

CENTRAL BATTERY SYSTEMS

- Central battery systems are the most cost-effective installation for all types of exit signs, with significant savings in initial purchase and operating costs.
- Remotes may be connected to one of the following central battery systems by Sigtex:
 - Series CBS UNIVERSAL CENTRAL BATTERY SYSTEM
 - Series MTL MASTER-REMOTE SYSTEM

CODES

- Manufactured and tested to UL Standard 924. Conforms to NFPA Life Safety Code 101, UBC and NEC.

WARRANTY

- 5 year total customer satisfaction warranty. For details see product catalog technical data section.

U.S. Patent 5, 276, 591



FIXTURE SCHEDULE

MODEL	CATALOG NO
APPROVAL	JOB INFORMATION



Crystal Recessed Remote

Edge-lit LED Exit Signs Series CRRRE

CRRRE.05.08.4

SUGGESTED SPECIFICATIONS:

Install Sigtex CRYSTAL Series CRRRE Remote recessed LED exit signs. The lamp housing and canopy shall be of extruded aluminum, graphic lenses shall be optical grade acrylic with diamond polished edges. Lighting uniformity shall be better than 4:1 when measured over any illuminated area and average brightness will exceed 6 ft Lambert (21 Cd/m²). Life expectancy of the LEDs shall be in excess of 20 years. The remote fixture may be connected either to a Series CBS central battery system (operation code C) or to a MULTILITE Master Sign (operation code M).


OPTIONS:

Waterfall Wall Mount-Clear
Waterfall Wall Mount-with Backplate
End Mount (Left/ Right)
End Mount- Free Lens (Left/ Right)
Damp Location
Pendant MT 12
Double Pendant Mt (Custom Length)
Mirror Background (SF)
White Background (SF & DF)
For other Custom Colors or Options: ContactFactory

CODE

WFC
WFB
LE/RE
LEF/REF
DP
PEN
2PENX
M
W

MOUNTING DATA & DIMENSIONS:

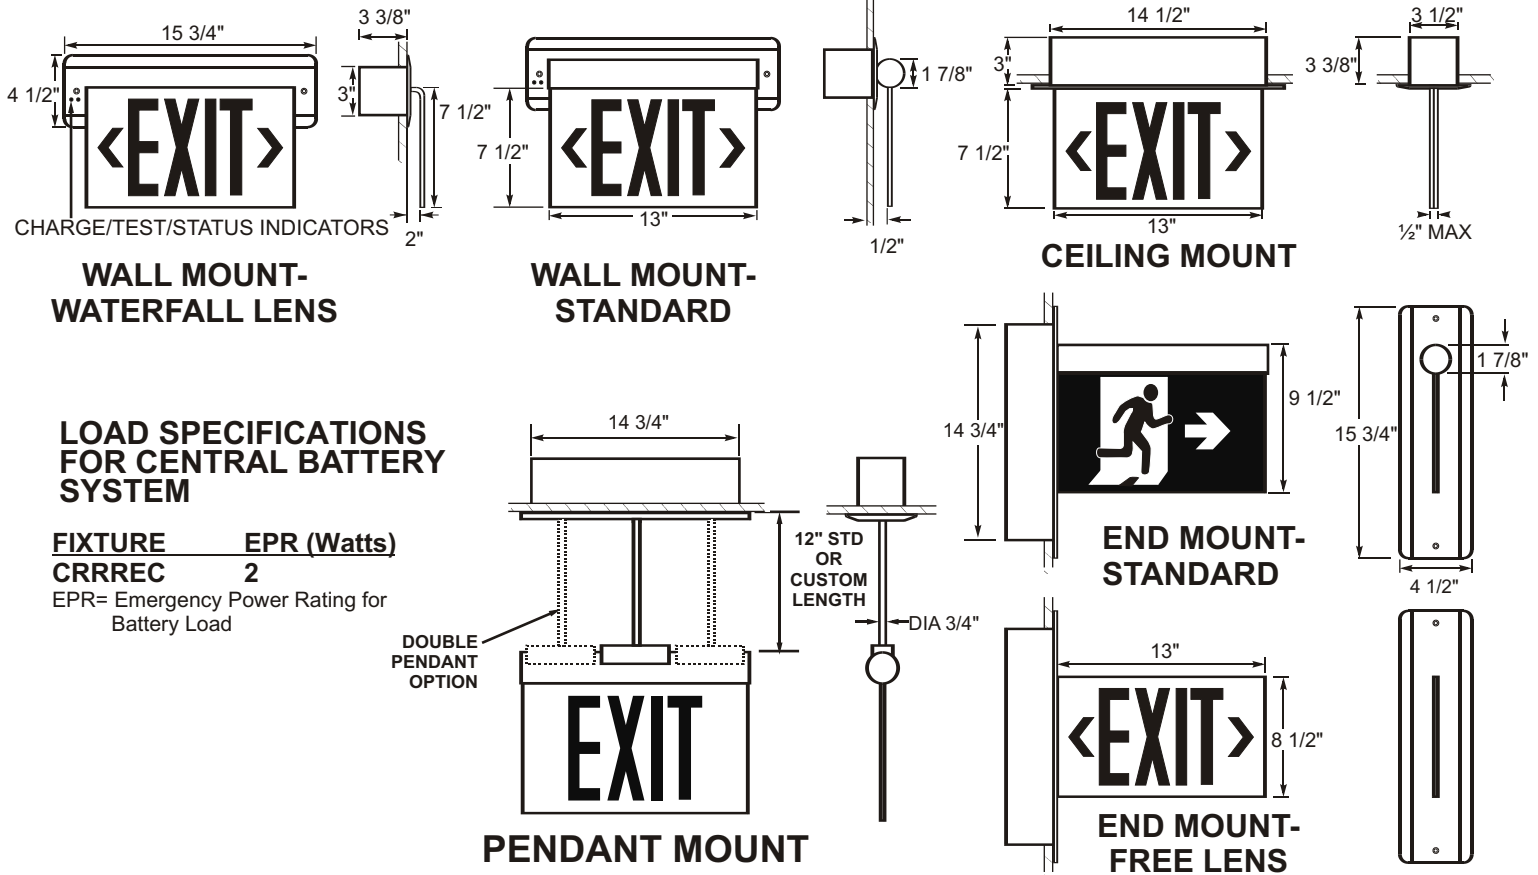

LOAD SPECIFICATIONS FOR CENTRAL BATTERY SYSTEM

FIXTURE	EPR (Watts)
CRRREC	2

EPR= Emergency Power Rating for Battery Load

ORDERING INFORMATION: EXAMPLE: CRRREM-1RCBA-NA-T-DP

CRRRE M - 1 R C BA - NA - T - DP

MODEL SERIES	OPERATION	NO. of FACES	LETTER COLOR	BACKGRD COLOR	STANDARD TRIM FINISH	ARROW DIRECTION	MOUNT	OPTIONS
CRRRE	M=Multilite Master Sign C=Universal Central Battery System	1= Single 2= Double	R= Red G= Green	C= Clear (SF) M=Mirror (DF) For Other Options See Above	W= White BA= Brushed Alum X= Custom	NA= No Arrow AR= Arrow Right > AL= Arrow Left < AB= Arrow Both <> Double Face Signs: NA= No Arrow LR= Single Arrow Each Side > AB= Double Arrow Each Side <>	T= Top W= Wall RE=Right End LE=Left End FL=Free Lens	See Above



Sigtex Inc
LIGHTING
220 VFW Avenue, Grasonville, MD 21638
TEL: (410) 827-8300 Fax: (410) 827-8866
sales@sigtexinc.com www.sigtexinc.com

DISTRIBUTOR: