


Crystal Surface Mount Remote

Edge-lit LED Exit Signs Series CRSRE

CRS.05.08.6

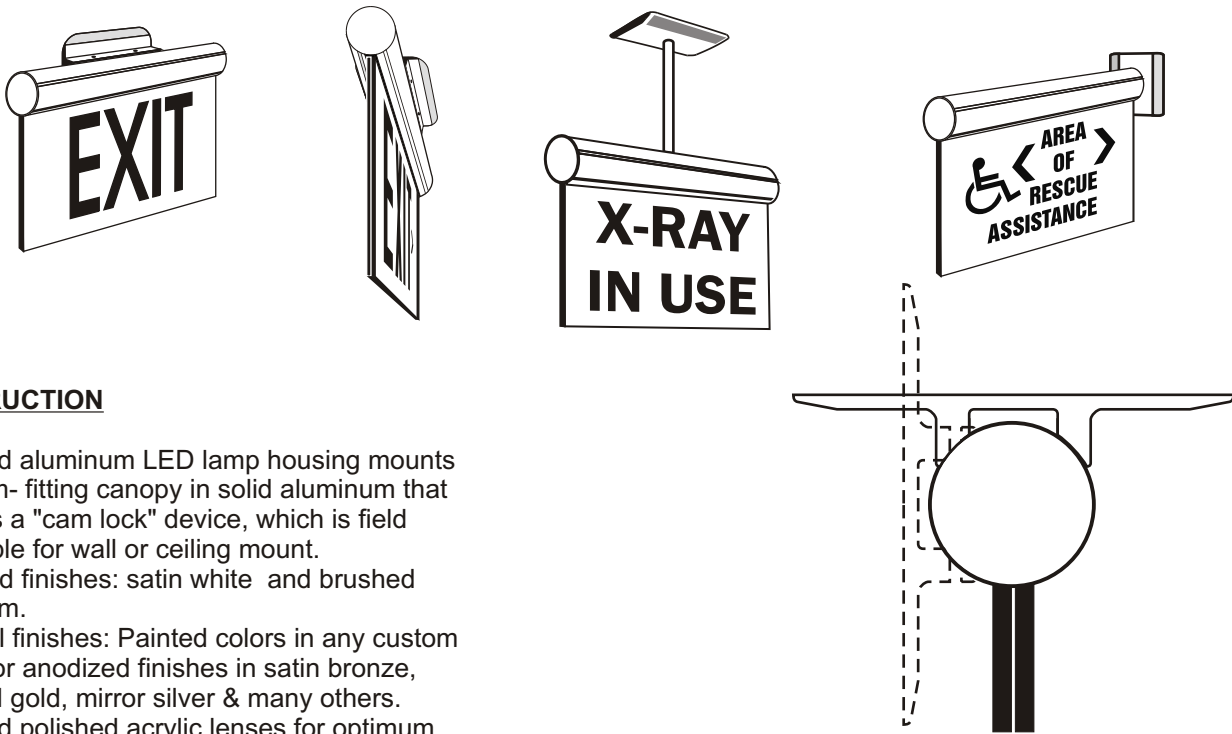

CONSTRUCTION

- Extruded aluminum LED lamp housing mounts to a form-fitting canopy in solid aluminum that contains a "cam lock" device, which is field adjustable for wall or ceiling mount.
- Standard finishes: satin white and brushed aluminum.
- Optional finishes: Painted colors in any custom shade, or anodized finishes in satin bronze, polished gold, mirror silver & many others.
- Diamond polished acrylic lenses for optimum light transmission, exterior quality and high brightness.
- Ultra high output LEDs produce brilliant graphic illumination well above code minimums.

CENTRAL BATTERY SYSTEMS

- Central battery systems are the most cost-effective installation for all types of exit signs, with significant savings in initial purchase and operating costs.
- Remotes may be connected to one of the following central battery systems by Sigtex:
 - Series CBS UNIVERSAL CENTRAL BATTERY SYSTEM
 - Series MTL MASTER-REMOTE SYSTEM

MOUNTING

- Field selectable wall or ceiling mount. No exposed hardware.

CODES

- Manufactured and tested to UL Standard 924. Conforms to NFPA Life Safety Code 101, UBC and NEC.

WARRANTY

- 5 year total customer satisfaction warranty. For details see product catalog technical data section.

FIXTURE SCHEDULE

MODEL	CATALOG NO
APPROVAL	JOB INFORMATION



Crystal Surface Mount Remote

Edge-lit LED Exit Signs Series CRSRE

CRS.05.08.6


SUGGESTED SPECIFICATIONS:

Supply and install Sigtex CRYSTAL Series CRSRE surface mount LED exit signs. The lamp housing and canopy shall be of extruded aluminum, graphic lenses shall be optical grade acrylic with diamond polished edges. Lighting uniformity shall be better than 4:1 when measured over any illuminated area and average brightness will exceed 6 ft Lambert (21 Cd/m²). Life expectancy of the LEDs shall be in excess of 20 years. The remote fixture may be connected either to a Series CBS central battery system (operation code C) or to a MULTILITE Master Sign (operation code M).

OPTIONS:

Pendant Mt 12"	PEN
Pendant Mt (Custom Length)	PENX
Damp Location	DP
End Mount (L/R)	LE/RE
Mirror Lens (SF)	M
White Lens (SF)	W
Satin Bronze	BZ
For other Custom Colors: Call Factory	

MOUNTING DATA & DIMENSIONS:

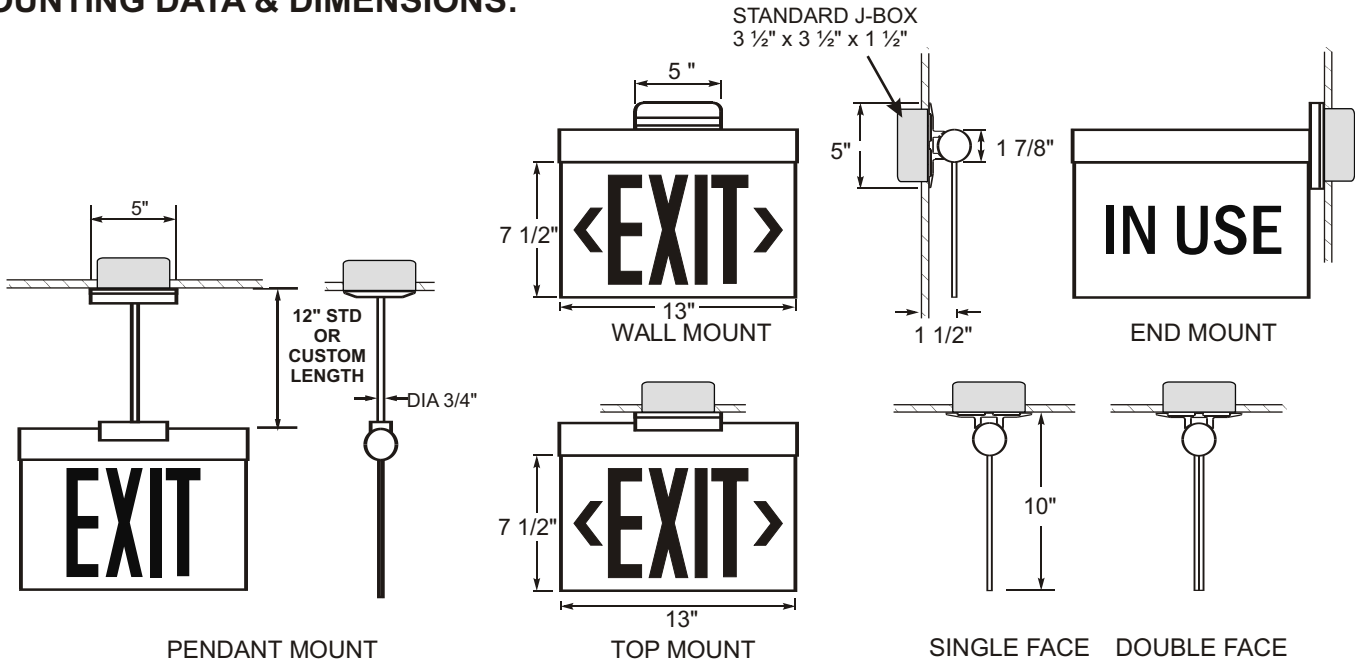

LOAD SPECIFICATIONS FOR CENTRAL BATTERY SYSTEM

FIXTURE EPR (Watts)

CRSREC 2

EPR= Emergency Power Rating for Battery Load

ORDERING INFORMATION: EXAMPLE: CRSREM-1RCBA-NA-TW-DP

CRSRE	M	-	1	R	C	BA	-	NA	-	DP
MODEL SERIES	OPERATION	NO. of FACES	LETTER COLOR	BACKGRD COLOR	STANDARD TRIM FINISH	ARROW DIRECTION		OPTIONS		
CRSRE	M=Multilite Master Sign C=Universal Central Battery System	1= Single 2= Double	R= Red G= Green	C= Clear (SF) M=Mirror (DF) For Other Options See Above	W= White BA= Brushed Alum X= Custom	NA= No Arrow AR= Arrow Right > AL= Arrow Left < AB= Arrow Both <> Double Face Signs: NA= No Arrow LR= Single Arrow Each Side > AB= Double Arrow Each Side <>		See Above		

Sigtex Inc
 LIGHTING
 220 VFW Avenue, Grasonville, MD 21638
 TEL: (410) 827-8300 Fax: (410) 827-8866
 sales@sigtexinc.com www.sigtexinc.com

DISTRIBUTOR:

