

Moonlite™ Emergency & Security Light


LED Outdoor Egress Exterior Wall Mount Series MOE

MOE.08.11.13

The Brightest Idea is Emergency Lighting with LEDs

GENERAL DESCRIPTION

MOE with die cast aluminum housing is designed for exterior use in wet locations but is also often used in interiors with potential hard use situations, such as gymnasiums, or hallways in apartment or condominium complexes.

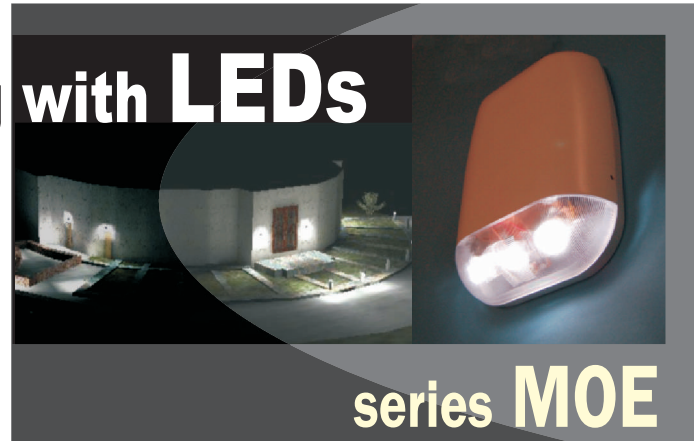

CONSTRUCTION

- Extremely compact die cast aluminum housing with molded polycarbonate lens. Standard finish white or bronze satin enamel paint; custom colors are available, including brushed aluminum anodized finishes.
- Universal J- Box mounting pattern.
- Contoured prismatic lens generates a uniform lighting pattern over required path of egress.
- Three versions available:
 - BB= Unit equipment with self-contained battery
 - RE= Remote for connection to Central Battery System
 - AC= Remote for connection to AC 120/277 emergency supply.

ENERGY EFFICIENT OPERATION

- Dual function operation for night or security lighting as well as emergency lighting.
- Very low power consumption in night/ security mode. This unit offers tremendous energy savings when compared to any fluorescent or incandescent lighting systems during night operations.
- Over 50,000 hour lamp life in normal use.
- IES photometric data available for all models.

ELECTRONICS

- Lamps are connected in parallel. If one lamp fails, one or more lamps will continue in operation.
- Universal 120/277 VAC input for standard battery or AC unit, or 24 VDC input for remote configuration.
- Power supply delivers regulated current and voltage to LED lamps at optimum levels to maximize lamp life.
- Automatic battery diagnostics available for all battery models.

CODES

- Manufactured and tested to UL Standard 924 and NFPA Life Safety Code 101.

WARRANTY

- 5 year total customer satisfaction warranty. For details see product catalog technical data section.



FIXTURE SCHEDULE

MODEL	CATALOG NO
APPROVAL	JOB INFORMATION




Moonlite™ Emergency & Security Light

LED Outdoor Egress Exterior Wall Mount Series MOE


MOE.08.11.13

SUGGESTED SPECIFICATIONS:

Install MOONLITE™ Series MOE Exterior Wall Mount LED emergency lighting fixture manufactured by Sigtex Inc., available as unit equipment or as a remote device connected to a central battery power source. Upon loss of AC building power, lighting will be activated for a minimum of 90 minutes under battery power, in compliance with UL 924 and NFPA 101. In remote configuration, the unit may be specified to operate continuously for security or night lighting, as required. The battery charger and power supply shall have universal input of 120/277 VAC, with brownout and LVD circuit protection. Auto battery diagnostics shall be available for all models, as specified and shall perform all test functions specified by UL 924 and NFPA 101. Suitable for Wet Locations, with ambient temperature ranges specified below.

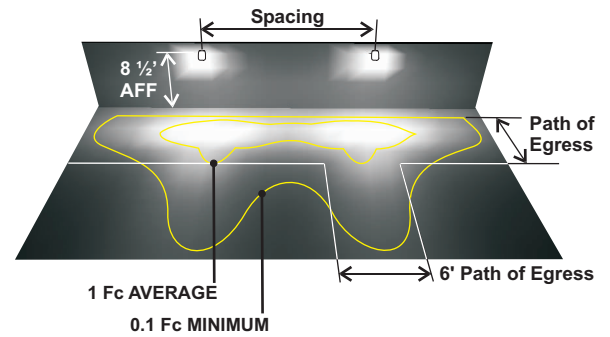

MOUNTING DATA & DIMENSIONS:

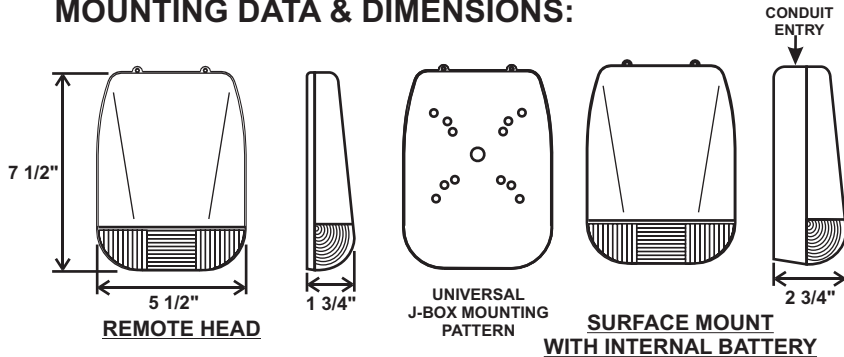

SPACING GUIDE

Average Illuminance 1 Fc

Model	Mtg. Ht.	SPACING		
		Path of Egress Width		
		3 Ft.	6 Ft.	10 Ft.
10 L2	8 1/2'	40'	30'	20'
15 L3*	8 1/2'	40'	35'	30'

*15 L3 Projection from Building: 30 Ft

NOTE: TESTED IN ACCORDANCE WITH IES STANDARD LM-79-08 FOR SOLID STATE LIGHTING PRODUCTS. FOR REFERENCE ONLY. STANDARD REFLECTANCES 80/50/20. SIGTEX IS NOT RESPONSIBLE FOR SPECIFIC CONDITIONS THAT MAY ALTER THE RESULTS. COMPLETE IES PHOTOMETRIC DATA AVAILABLE AT WWW.SIGTEXINC.COM FOR YOUR CONVENIENCE.

CONTACT SIGTEX FOR LAYOUT ASSISTANCE
Code Compliant Emergency lighting layouts provided free of charge!

SECURITY/NIGHT LIGHTING POWER RATING (SPR)

The Catalog Number for MOONLITE LED fixtures specifies the number of lamps used:

L2 = Two LED lamps per fixture

L3 = Three LED lamps per fixture

For the total SPR per fixture, multiply the number of lamps by the power ratings below:

STANDARD: 2 WATTS PER LED

CUSTOM: 5 WATTS MAX PER LED*

* Varies by Model. Contact factory for information.

SUITABLE FOR WET LOCATIONS AMBIENT TEMPERATURE LIMITS:

"BB" models with "LT" option: -40° C to +30° C**

Standard "BB" models: -20° C to +40° C

Remote models: -40° C to +50° C**

** NOTE Security Lighting is **REQUIRED** for operations at -40° C

ORDERING INFORMATION: EXAMPLE: MOERE15L3W-DP

MOE	RE	15L3	W	DG
MODEL SERIES	OPERATION	EMERGENCY POWER RATING	HOUSING COLOR	OPTIONS
MOE	BB= Battery Backup RE= Remote with Central Battery System AC= AC Supply 120/277V	10L2 = 10 Watts / 2 lamp 15L3 = 15 Watts / 3 Lamp 8L2 = 8 Watts AC 12L3 = 12 Watts AC	W=White B= Bronze 'X'=Custom	DG= Battery Diagnostics PH=Photocell Lighting Control (Available for RE & BB-DG models) LT= Low Temp -40°C in BB Models WD = Wash Down TD20 = 20 Minute Time Delay SW= Security Lighting with Control Switch*

*Models with battery backup and the SW option may operate in low power Security Lighting mode when connected to the active building AC supply and wired according to Installation Instructions. The security lighting circuit is independent of emergency lighting and may be switched manually, by an exterior photocell, or other automatic means.



Sigtex Inc
LIGHTING

220 VFW Avenue, Grasonville, MD 21638

TEL: (410) 827-8300 Fax: (410) 827-8866

sales@sigtexinc.com www.sigtexinc.com

DISTRIBUTOR:

Specifications and Dimensions subject to change without notice.