



Rapier

Open Face

Diecast LED System Series RPRO

RPRO.11.09.07



CONSTRUCTION

- Ultra Slim diecast aluminum LED emergency exit lighting system; the wall mount profile is 1/2" above the surface.
- The diecast outer housing contains a closely fitted acrylic lens. An LED array is recessed into the housing. The assembly is extremely rugged and the standard products can withstand severe impact and vibration without damage.
- For even further protection, clear polycarbonate security covers are available.

MULTILITE MASTER-REMOTE SYSTEM

- All versions of this product have multiple remote capabilities. Up to 30 remotes may be connected to a Central Panel (Series MCS), or up to 5 remotes may be connected to a Master Sign (Series MTL). See MULTILITE spec sheets for full details.
- MULTILITE is the most cost-effective installation for all types of exit lights.

ELECTRONICS

- Isolated, all solid state power supply with 2- wire universal input from 120 VAC to 277 VAC with precise current and voltage regulation.
- Power supply is surge and spike protected, with a low voltage disconnect.
- The complete power supply module with optional NICAD battery pack is sealed within a phenolic plastic enclosure, which fits inside a standard 4" square deep J- box. AC and DC wiring is quickly attached with plug connectors.

CODES

- Manufactured and tested to UL Standard 924. Conforms to NFPA Life Safety Code 101, UBC and NEC.

WARRANTY

- 5 year total customer satisfaction warranty. For details see product catalog technical data section.

U.S. Patent 5, 276, 591



FIXTURE SCHEDULE

MODEL	CATALOG NO
APPROVAL	JOB INFORMATION



Rapier

Open Face

Diecast LED System

Series RPRO

RPRO.11.09.07

SUGGESTED SPECIFICATIONS:

Supply and install Sigtex RAPIER Series RPRO Open Face LED exit signs. The face and housing shall be of diecast aluminum with maximum thickness of 5/8" (single face). Lighting uniformity shall be better than 4:1 when measured over any illuminated area and average brightness will exceed 6 ft Lambert (21 Cd/m2). Life expectancy of the LEDs shall be in excess of 20 years. The power supply and charger shall be an isolated digital type with regulated current and voltage output to the lamp load. AC supply shall be universal 120/277 VAC input via two-wire feed. One standard power supply shall be capable of driving up to 5 single face remote signs in addition to the master.


OPTIONS:

Damp Location	DP
Pendant MT 12"	PEN
Satin Black	B
Satin Bronze	BZ
Recess Kit	REC
Dual AC Circuit	DAC
Wide Window Width	WW
<u>For other Custom Colors: Call Factory</u>	

CODE

NOTE: PRE-INSTALL 4" X 4" X 2 1/8" DEEP J-BOX WITH 1 1/2" EXTENSION RING

MOUNTING DATA & DIMENSIONS:

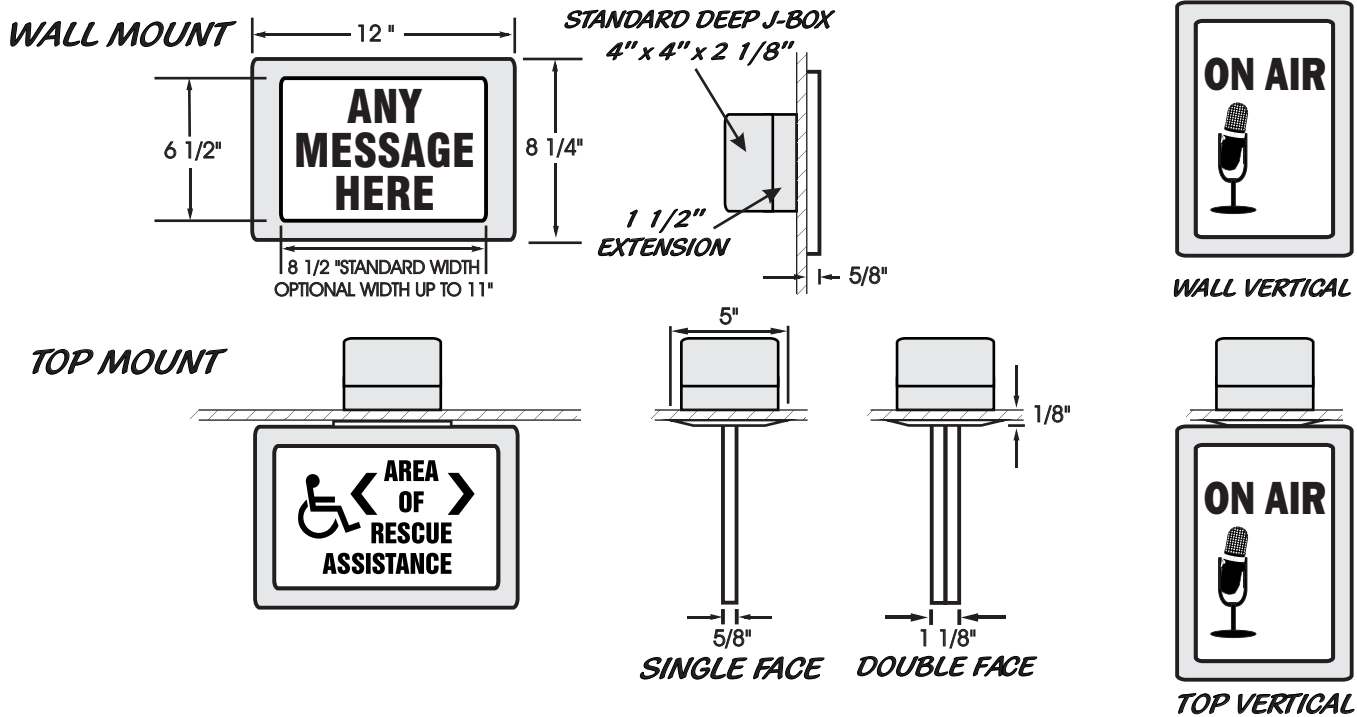

ORDERING INFORMATION: EXAMPLE: RPRO NB 1 R W W-TW-'X-RAY IN USE

RPRO	NB	1	G	B	BA	-TW	-DG	"X-RAY IN USE"
MODEL SERIES	OPERATION	NO. of FACES	GRAPHICS COLOR	BACKGROUND COLOR	STANDARD TRIM FINISH	MOUNT	OPTIONS	GRAPHIC
RPRO= OPEN FACE	NB=No Battery BB=Battery Backup	1= SINGLE 2= DOUBLE	R=RED G=GREEN	W=WHITE B=BLACK FOR CUSTOM COLORS CONTACT FACTORY	W=WHITE BA=BRUSHED ALUMINUM FOR CUSTOM COLORS CONTACT FACTORY	LE=LEFT END RE=RIGHT END TW=UNIVERSAL TOP OR WALL TV=TOP VERTICAL WV=WALL VERTICAL	SEE LIST ABOVE	"GRAPHIC"

Sigtex Inc
LIGHTING
220 VFW Avenue, Grasonville, MD 21638
TEL: (410) 827-8300 Fax: (410) 827-8866
sales@sigtexinc.com www.sigtexinc.com

DISTRIBUTOR: