

**CONSTRUCTION**

- Ultra Slim diecast aluminum LED emergency exit lighting system; the wall mount profile is 1/2" above the surface.
- The diecast outer housing contains a closely fitted acrylic lens. An LED array is recessed into the housing. The assembly is extremely rugged and can withstand severe impact and vibration without damage.
- For even further protection, clear polycarbonate security covers are available.

**ELECTRONICS**

- Universal 120/ 277 VAC input for standard battery or AC unit, or 12- 24 VDC input for remote configuration with Central Battery System.
- Remotes may be connected to one of the following:
  - Series CBL or CBM UNIVERSAL CENTRAL BATTERY SYSTEM
  - Series MTL MASTER-REMOTE SYSTEM
- Power supply is surge and spike protected, with a low voltage disconnect.
- The complete power supply module with optional NICAD battery pack is sealed within a phenolic plastic enclosure, which fits inside a standard 4" square deep J- box. AC and DC wiring is quickly attached with plug connectors.



**DIAGNOSTICS OPTION**

- In standard battery modes, an advanced microprocessor monitors all charger functions and battery condition continuously and automatically performs all tests and visual indications required by UL Standard 924 and NFPA 101.

**CODES**

- Manufactured and tested to UL Standard 924. Conforms to NFPA Life Safety Code 101, UBC and NEC.

**WARRANTY**

- 5 year total customer satisfaction warranty. For details see product catalog technical data section.

U.S. Patent 5, 276, 591

**FIXTURE SCHEDULE**

<b>MODEL</b>	<b>CATALOG NO</b>
<b>APPROVAL</b>	<b>JOB INFORMATION</b>



## SUGGESTED SPECIFICATIONS:

Supply and install Sigtex RAPIER Series LED exit signs, available as unit equipment or as a remote device connected to a central battery power source. The face and housing shall be of diecast aluminum with maximum thickness of 5/8" (single face). Lighting uniformity shall be better than 4:1 when measured over any illuminated area and average brightness will exceed 6 ft Lambert (21 Cd/m<sup>2</sup>). Life expectancy of the LEDs shall be in excess of 20 years. The power supply and charger shall be an isolated digital type with regulated current and voltage output to the lamp load and batteries (emergency models). AC supply shall be universal 120/277 VAC input via two-wire feed. One standard power supply shall be capable of driving up to 5 single face remote signs in addition to the master, with emergency operation at least 90 minutes for each sign. Battery charge time to restore full capacity after discharge shall be less than 24 hours.

## OPTIONS:


## CODE

Damp Location	DP
Battery Diagnostics	DG
Dual AC Input (120 VAC)	DAC
End Mount (Left/ Right)	LE/ RE
Polycarbonate Security Cover	PSR*
Polycarbonate Face	
Single Face	PF1*
Double Face	PF2*
Wire Guard	WG
Pendant MT 12"	PEN
Thin Double Face	TDF
Recessed Mount	REC
Satin Black	B
Satin Bronze	BZ

\*See data sheet Series PSR  
For other Custom Colors Contact Factory

**NOTE: PRE- INSTALL 4" X 4" X 2 1/8" DEEP J- BOX WITH 1 1/2" EXTENSION RING FOR BB & NB MODELS**


## MOUNTING DATA & DIMENSIONS:

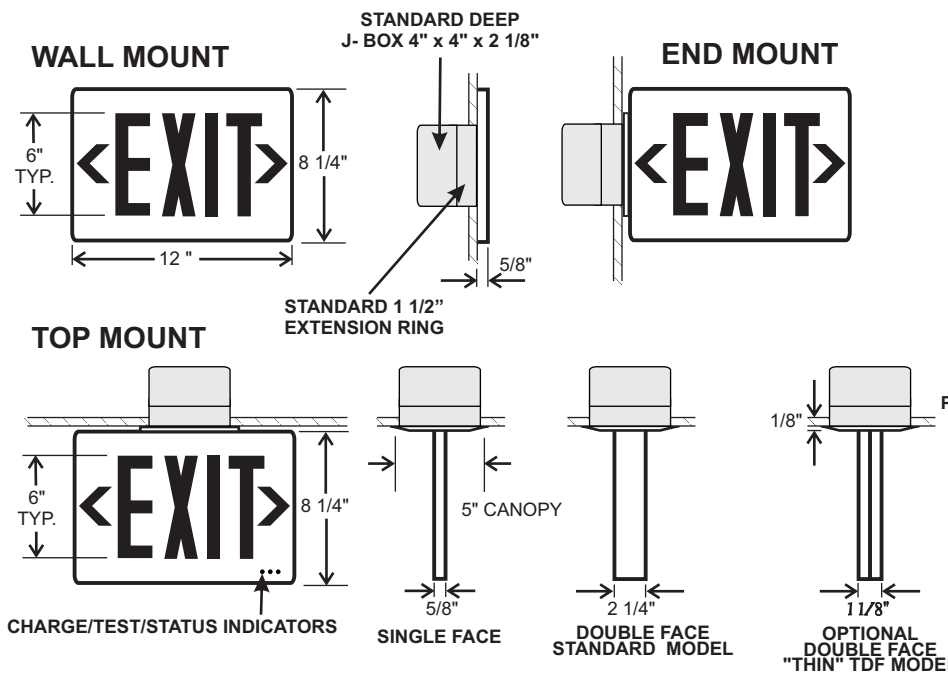

## SELF-TEST DIAGNOSTIC FUNCTIONS

STATUS	LED DISPLAY
NORMAL MODE	OFF
FAILED LAMP	GREEN
FAILED CHARGER	RED
FAILED TRANSFER	ORANGE
FAILED BATTERY	RED FLASH
FAILED ANNUAL TEST	ORANGE FLASH

## PENDANT MOUNT

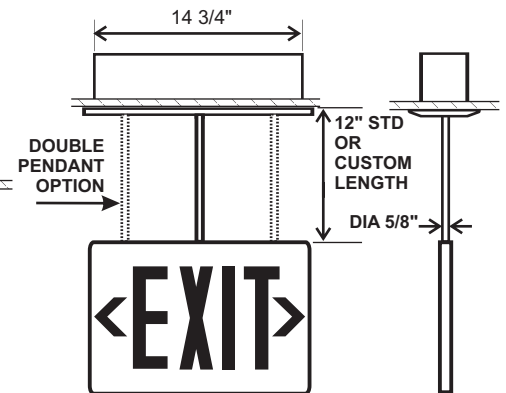

## ORDERING INFORMATION: EXAMPLE: RPRBB1GW-TW-DG

RPR	NB	1	G	W	-TW	-DG
<b>MODEL SERIES</b>	<b>OPERATION</b>	<b>NO. of FACES</b>	<b>LETTER COLOR</b>	<b>FACE COLOR</b>	<b>MOUNT</b>	<b>OPTIONS</b>
RPR=THIN PROFILE DIECAST	BB= Battery Backup NB= No Battery (Ac Only) REC=Remote w/ Central Battery System REM=Remote w/ Master Remote System	1= SINGLE 2= DOUBLE	R=RED G=GREEN	BA=BRUSHED ALUMINUM W= WHITE <b>FOR CUSTOM COLORS CONTACT FACTORY</b>	TW=UNIVERSAL TOP OR WALL	SEE LIST ABOVE

**Emergency Power Rating:**  
Single Face: 2 Watts  
Double Face: 4 Watts



# Sigtex Inc

LIGHTING

220 VFW Avenue, Grasonville, MD 21638  
TEL: (410) 827-8300 Fax: (410) 827-8866  
sales@sigtexinc.com www.sigtexinc.com

**DISTRIBUTOR:**

Specifications and Dimensions subject to change without notice.