


# Polycarbonate Security Cover for Emergence Series Self-luminous signs

**Series PSC**  
PSC.08.074

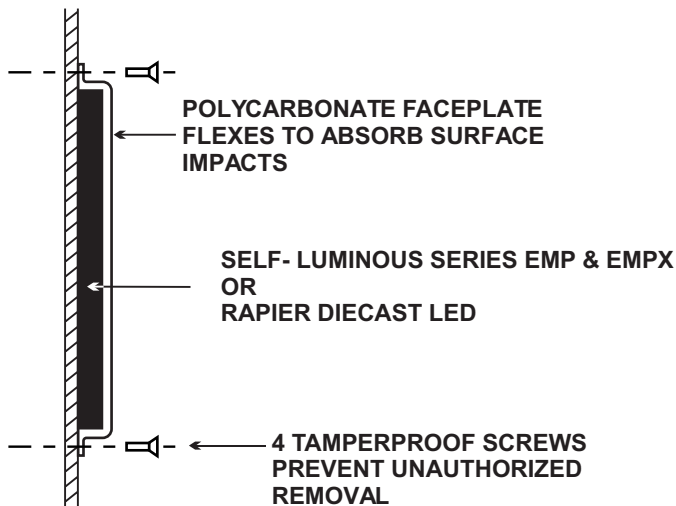

## CONSTRUCTION

- Clear polycarbonate enclosure with rounded corners to withstand high impact without damage. Tamper-proof screws prevent unauthorized removal.

## SELF-LUMINOUS SIGNS

- Suitable for use in hazardous atmospheres and wet locations. Meets NEC Article 500 Class I and II conditions. LED signs are listed for Damp Locations UL 924.

## CODES AND APPROVALS

- Manufactured and tested to UL Standard 924 for Floor Proximity Exit Signs, and Life Safety Code NFPA 101. Self-luminous signs also meet requirements of National Electrical Code Article 500, Class I and II conditions.

## WARRANTIES

- 5 year customer satisfaction warranty is provided against failure to meet required standards as specified on the product label. See catalog for complete details.



## FIXTURE SCHEDULE

MODEL	CATALOG NO
APPROVAL	JOB INFORMATION



# Polycarbonate Security Cover for Emergence Series Self-luminous signs

**Series PSC**  
PSC.08.074

## SUGGESTED SPECIFICATIONS:

Furnish and install SIGNTEX Polycarbonate Security Cover, with 1/8" minimum wall thickness and 45 degree beveled edges on four sides. The cover shall meet impact tests and other requirements of UL Standard 924 for Floor Proximity Signs.

This component can be used with the following Sigtex signs, in *single face*, *wall mount* configuration:


Self-Luminous Exit Signs Series EMP

To include with Sign:  
Add Option Code PSC to Sign Catalog No.

Example: EMP101RW- PSC

## MOUNTING DATA & DIMENSIONS:

EMERGENCE SERIES	H	D
EMP	9 3/8"	14 1/2"
EMA	10 1/8"	15 1/8"

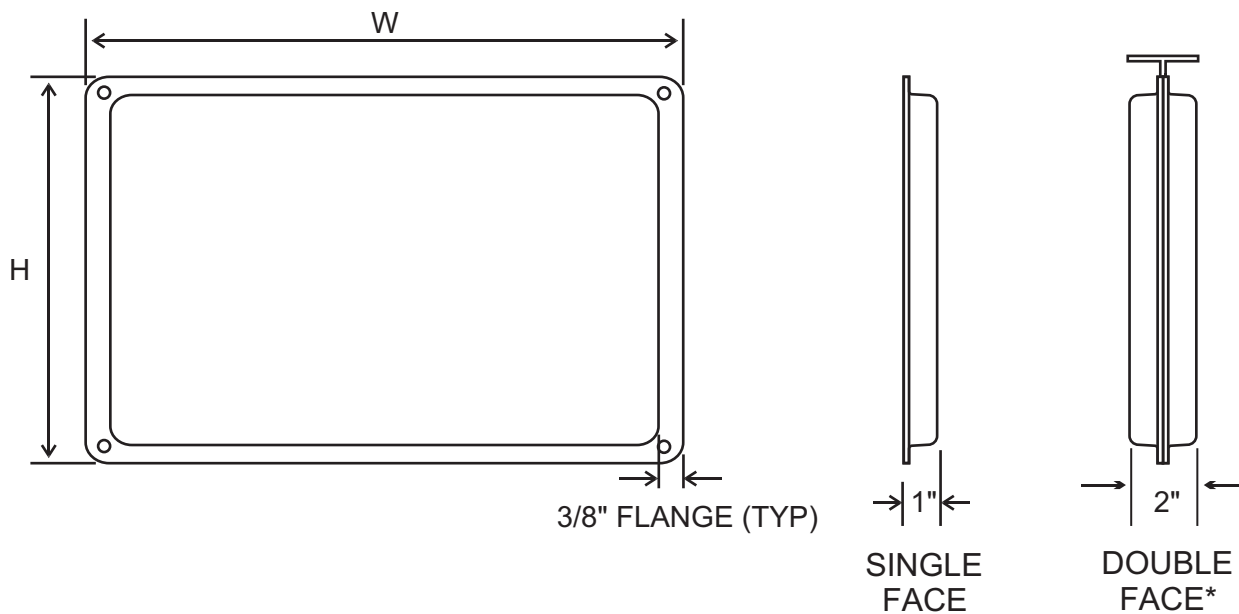

TO SPECIFY MODEL, USE OPTION CODE PSC (SINGLE FACE)  
2PSC (DOUBLE FACE)



**Sigtex Inc**  
LIGHTING

220 VFW Avenue, Grasonville, MD 21638  
TEL: (410) 827-8300 Fax: (410) 827-8866  
sales@sigtexinc.com www.sigtexinc.com

**DISTRIBUTOR:**