

GENERAL DESCRIPTION

Attractive and easy to install. The BLD Series combines quality LED illumination with contemporary, soft corner styling to complement any application. Precision molded housing, backplate and mounting canopy constructed of impact-resistant, flame-retardant, UV stable thermoplastic resists denting, peeling, scratching and corrosion with NFPA approved field selectable chevrons. Available in white and black finishes.




FEATURES

- UL94 V-0 flame retardant thermoplastic housing with universal faceplates and mounting canopy.
- Easy to install, snap together construction.
- Constant current LED driver accepts universal 12V- 24VDC supply from the Sigtex Central Battery System.
- Less than two watts power consumption.

INSTALLATION

- Simple snap together universal design allows for faceplate and backplate to be fully interchangeable. Mounting canopy is supplied with all signs and snaps into enclosure with two positive locking tabs.
- 20 In³ Junction Box

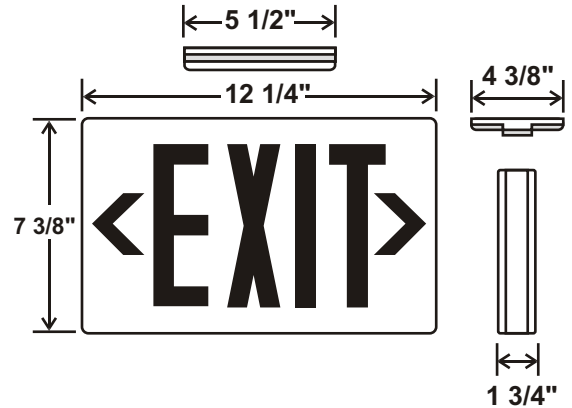

SUGGESTED SPECIFICATIONS

Supply and install Sigtex BUILDER Series BLD LED exit signs. The face and housing shall be of thermoplastic flammability rated UL94 V-0 with housing dimensions of 12 3/4" x 7 3/8" x 1 3/4". Lighting uniformity shall be better than 4:1. Power supply shall accept 12-24 VDC. All models shall operate from the Sigtex Series CBS Central Battery System which is listed and labeled per requirements of UL Standard 924.

ORDERING INFORMATION: EXAMPLE: BLDRECURW

BLD	REC	U	R	W
MODEL SERIES	OPERATION	UNIVERSAL	LETTER COLOR	HOUSING COLOR
BLD	REC= Remote for operation with Central Battery System	U= Universal Single or Double Face	R= Red G= Green	W= White B= Black For Custom Color Contact Factory



Sigtex Inc
LIGHTING

220 VFW Avenue, Grasonville, MD 21638
TEL:(410)827-8300 Fax:(410)827-8866
sales@sigtexinc.com www.sigtexinc.com

DISTRIBUTOR: