

Series PF1/ PF2 Faceplate



CONSTRUCTION

Clear polycarbonate enclosure with rounded corners to withstand high impact without damage. Tamper-proof screws prevent unauthorized removal.

WARRANTIES

5 year customer satisfaction warranty is provided against failure to meet required standards as specified on the product label. See catalog for complete details.

CODES AND APPROVALS

Manufactured and tested to UL Standard 924 for Floor Proximity Exit Signs, and Life Safety Code NFPA 101. Self luminous signs also meet requirements of National Electrical Code Article 500, Class I and II conditions.



FIXTURE SCHEDULE

MODEL	CATALOG NO
APPROVAL	JOB INFORMATION





SUGGESTED SPECIFICATIONS:


Furnish and install SIGNTEX Polycarbonate Security Cover, with 1/8" minimum wall thickness and 45 degree beveled edges on four sides. The cover shall meet impact tests and other requirements of UL Standard 924 for Floor Proximity Signs.

MOUNTING DATA & DIMENSIONS:

Series PF1/ PF2 Faceplate

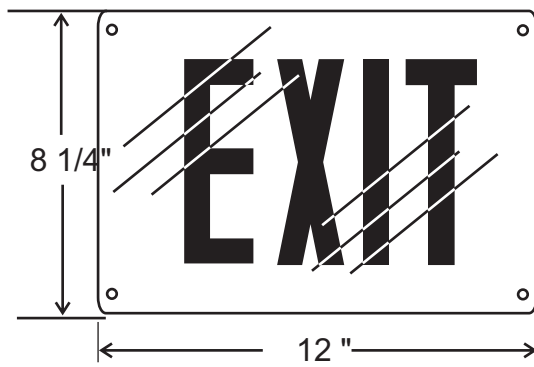

PF1

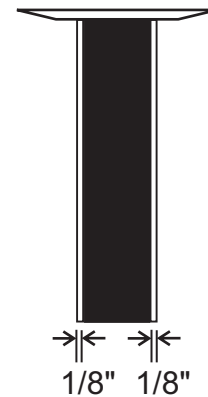

PF2

TO SPECIFY MODEL USE OPTION CODES:

PF1: Single Face Polycarbonate Faceplate

PF2: Double Face Polycarbonate Faceplate



Signtex Inc
LIGHTING

220 VFW Avenue, Grasonville, MD 21638
TEL: (410) 827-8300 Fax: (410) 827-8866
sales@signtexinc.com www.signtexinc.com

DISTRIBUTOR: