


PHOTOMETRIC DATA

Model: BVTPLD-35-35KMV (4,244 lumens)

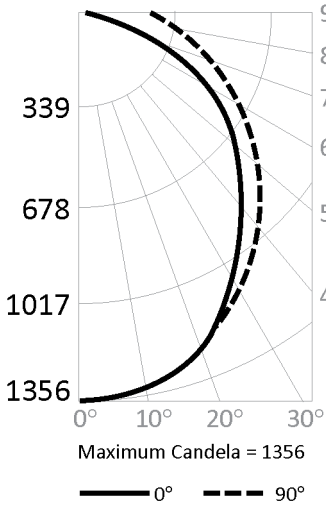


CANDLEPOWER SUMMARY

	0°	90°
0°	4,356	1,356
10°	1,326	1,329
20°	1,234	1,242
30°	1,088	1,122
40°	902	987
50°	698	841
60°	493	692
70°	297	540
80°	119	378
90°	17	240


ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0° - 10°	128	3.0%
0° - 20°	489	11.5%
0° - 30°	1,026	24.2%
0° - 40°	1,661	39.1%
0° - 50°	2,312	54.5%
0° - 60°	1,912	68.6%
0° - 70°	3,403	80.2%
0° - 80°	3,752	88.4%
0° - 90°	3,957	93.2%
90° - 180°	287	6.8%
0° - 180°	4244	100.0%

CONE OF LIGHT

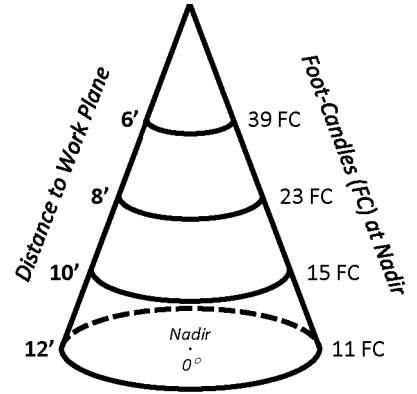

Model: BVTPLD-40-35KMV (4,793 lumens)

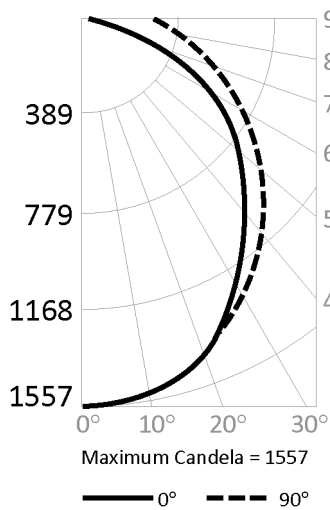


CANDLEPOWER SUMMARY

	0°	90°
0°	1,557	1,557
10°	1,521	1,524
20°	1,416	1,413
30°	1,245	1,267
40°	1,027	1,110
50°	788	941
60°	547	772
70°	326	610
80°	131	424
90°	18	259


ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0° - 10°	147	3.1%
0° - 20°	562	11.7%
0° - 30°	1,176	24.5%
0° - 40°	1,899	39.6%
0° - 50°	2,638	55.0%
0° - 60°	3,311	69.1%
0° - 70°	3,861	80.6%
0° - 80°	4,254	88.8%
0° - 90°	4,486	93.6%
90° - 180°	307	6.4%
0° - 180°	4,793	100.0%

CONE OF LIGHT

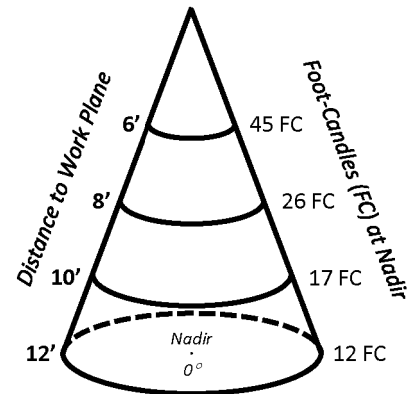

Model: BVTPLD-52-35KMV (6,469 lumens)

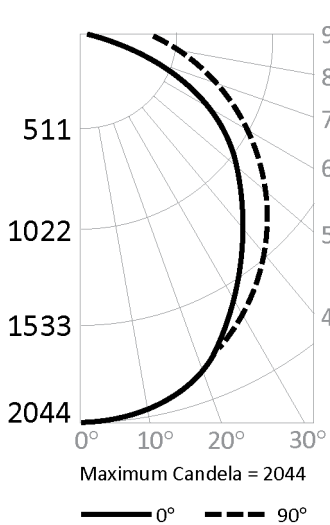

CANDLEPOWER SUMMARY

	0°	90°
0°	2,044	2,044
10°	2,003	2,013
20°	1,867	1,895
30°	1,643	1,701
40°	1,356	1,505
50°	1,030	1,313
60°	709	1,075
70°	415	807
80°	164	546
90°	24	344

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0° - 10°	193	3.0%
0° - 20°	743	11.5%
0° - 30°	1,561	24.1%
0° - 40°	2,527	39.1%
0° - 50°	3,521	54.4%
0° - 60°	4,436	68.6%
0° - 70°	5,185	80.1%
0° - 80°	5,713	88.3%
0° - 90°	6,027	93.2%
90° - 180°	442	6.8%
0° - 180°	6,469	100.0%

CONE OF LIGHT

