

# Combo Series

# Downlight Thermoplastic Combo Series CLP

REV #: 08.21.01

## ILLUMINATION

- Ultra bright, energy efficient LED emergency lighting.
- High performance linear down light with adjustable angle for optimal lighting.
- Long life, energy efficient Red or Green LED Exit sign illumination

## ELECTRICAL

### AC Operation

- Universal Input 120/277VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### DC Operation

- 24VDC for Central Storage Battery systems.
- 60VDC for POE or DC power distribution systems.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Universal Single/Double Face
- EZ snap-out Chevron directional indicators.
- Adjustable Down Light

## OPTIONS

- Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- Custom: Signs available with requested "special" wording
- DC Operation


## WARRANTY/LISTING

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CED under Title 20 Regulations

PROJECT:

TYPE:

CATALOG #:

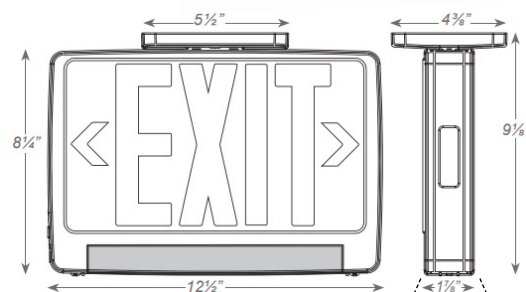

ADJUSTABLE  
LINEAR DOWNLIGHT

## STANDARD:



## OPTIONAL:



## FIXTURE ORDERING INFORMATION EXAMPLE: CLP-BB-U-R-W-DG

CLP

SERIES	OPERATION	# OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
CLP	BB	120/277VAC with Battery	U Universal	R Red	DG Self-Test Diagnostics
	REC	Central Battery	Single/Double Face	G Green	48 48VDC input <sup>1</sup>
					60 60VDC input <sup>1</sup>
					CUSTOM Custom Wording

<sup>1</sup>REC models

Special voltage & SALIDA face plate options available.  
Contact Sigtex for more information.



INTELLIGENT EMERGENCY LIGHTING SYSTEMS