

# Builder Series

# NEMA4X/NSF Exit Sign Series NSF

REV #: 09.21.01

## ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.

## ELECTRICAL

### AC Operation

- Universal Input 120/277VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### DC Operation

- 12-24VDC for Central Storage Battery systems.
- 12-60VDC for POE or DC power distribution systems.

## MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount

## HOUSING

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

## OPTIONS

- DG: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 48 & 60: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.


## WARRANTY/LISTING

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.
- Meets City of Chicago Requirements.

PROJECT:

TYPE:


CATALOG #:

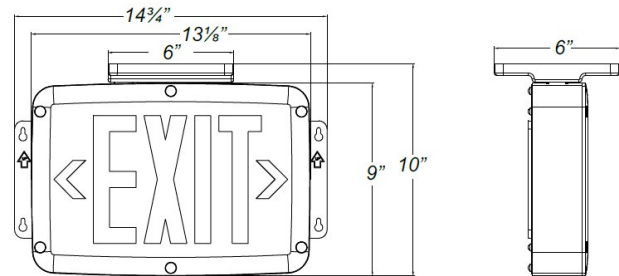

## STANDARD:



## OPTIONAL:



## FIXTURE ORDERING INFORMATION EXAMPLE: NSF-1-BB-R-W-DG

NSF

| SERIES | # OF FACES    | OPERATION                         | LETTER COLOR | HOUSING COLOR | OPTIONS                                                                                                                       |
|--------|---------------|-----------------------------------|--------------|---------------|-------------------------------------------------------------------------------------------------------------------------------|
| NSF    | 1 Single Face | BB 120/277VAC with Battery        | R Red        | W White       | DG Self-Test Diagnostics <sup>1</sup>                                                                                         |
|        | 2 Double Face | NB AC only<br>REC Central Battery | G Green      | A Aluminum    | 48 12-48VDC input <sup>2</sup><br>60 12-60VDC input <sup>2</sup><br>2C Dual Circuit Operation <sup>3</sup><br>TP Tamper Proof |